
SEAVIEW// ELEVATE YOUR ELECTRONICS

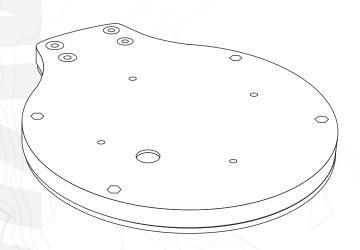


INSTALLATION INSTRUCTIONS


For Seaview Modular Top Plate:

ADA-S4

Refer to website for most up to date instructions and videos.


WWW.SEAVIEWGLOBAL.COM

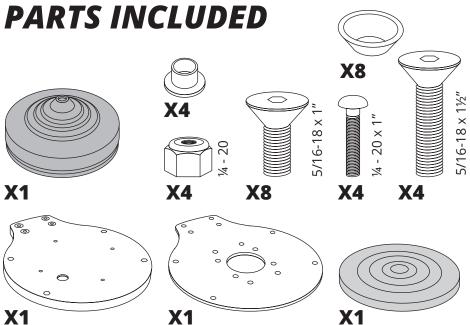

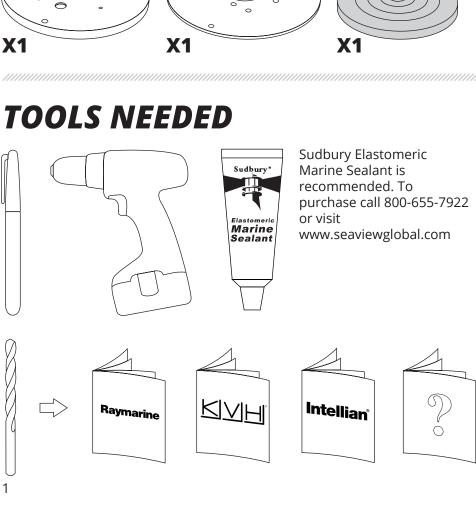

Secure the lower adapter plate to the Seaview mount with the eight 5/16-18x1" bolts and nylon washers.






Insert the four nuts into the top adapter plate as shown. Then insert the rubber grommet into the hole, making sure that the lip fits into the grommet.

TIP


Place the connector of the cable into a plastic bag. Apply Vasoline to the exterior of the plastic bag. Then try routing the connector/cable through the black rubber grommet.



3


Insert the four $1/4-20 \times 1$ " bolts into the adapter plate as shown.



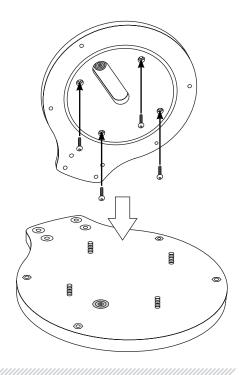


4

Attach the satellite dome to the adapter plate, and secure onto the four 1/4-20 x 1" bolts.

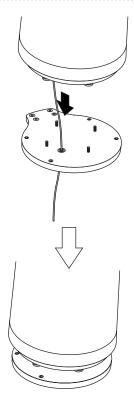


Apply marine adhesive sealant to the ciruclar groove on the underside of the top adapter plate. Route the cables through the adapter plates and rubber grommet. And secure the adapter plates together with the four 5/16-18x1-1/2" bolts and nylon shoulder washers.

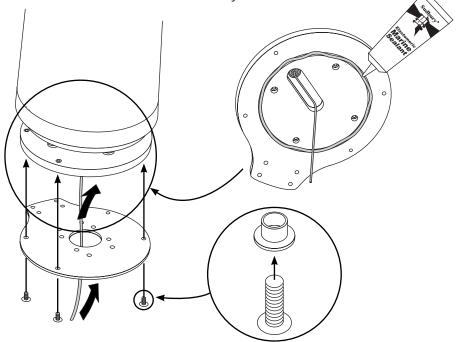


OPTIONAL ACCESSORIES

Call 800-655-7922 or visit www.seaviewglobal.com for available accessories.

LIGHT BARS




LTB-R Fits closed dome radars.



LTB-S Fits 20" or smaller satdomes.


LIGHT BAR TOPS



LTBP-1197 Perko 1197 Light.



LTBA-7800 Attwood LED Light.




LTBU1A1197 Light Bar Top with Perko 1197 Light, can fit GPS.



LTBU1A800Light Bar Top with Attwood LED Light, can fit GPS.

SPREADER KIT



SP1-MOD

Allows user to mount GPS units or antennas onto a Seaview Modular Mount.

This page is intentionally left blank.



SEAVIEW//

Tel: 800-655-7922 www.seaviewglobal.com

EUROPEAN OFFICE

Tel: +33 4 94 53 27 70 www.seaviewprogress.com